


SID (VECTOR)

**THUNDER BAY FIVE DEP (CYQT 5.)**

THUNDER BAY  
THUNDER BAY ON

ATIS	128.8	285.3
GND	121.9	275.8
TWR	118.1	236.6
O/T RDO	118.1	
	236.6 (MF 5 NM)	
DEP	119.2	363.8

RWY	VNAP
07, 12, 30	A or B

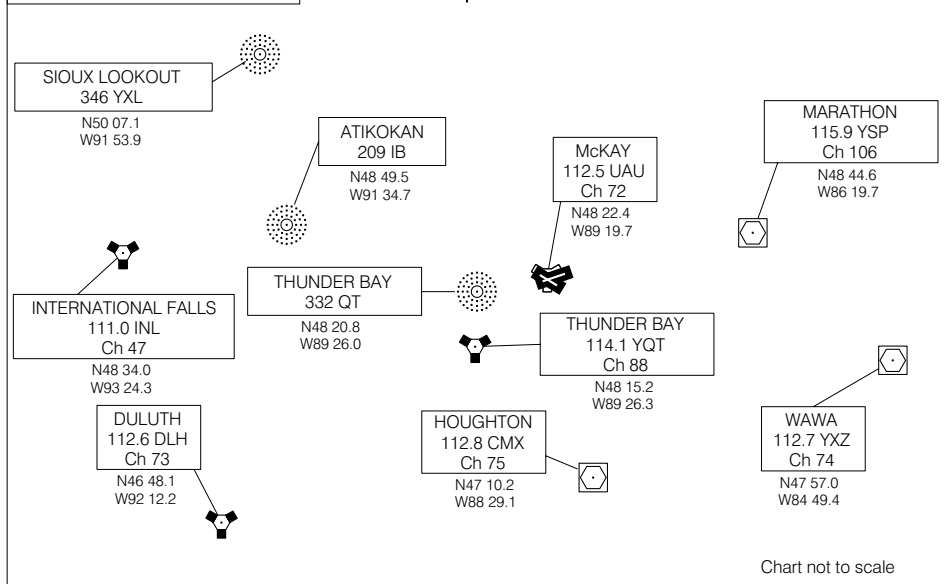

**DEPARTURE ROUTE DESCRIPTION**

Rwys 07, 25 & 30: Climb rwy hdg or as assigned by ATC. MAINTAIN 5000 ASL or flight planned altitude, whichever is lower. Anticipate radar vectors to filed/assigned route. Expect clearance to flight planned altitude/flight level within 10 minutes after departure.

- NOTE:
- 1) Refer to Noise Abatement Procedures for additional requirements.
  - 2) SID not available for Rwy 12 due to high terrain.

**COMMUNICATION FAILURE**

Transponder mode A/3 code 7600. On recognition of a communications failure 10 minutes or less after take-off, and in IFR conditions:

1. Upon reaching last assigned altitude proceed directly on course.
2. Maintain last assigned altitude for 10 minutes after take-off.
3. Climb to flight planned altitude.

Note: If communication failure occurs more than 10 minutes after take-off, comply with the appropriate procedure for communication failure enroute.

**THUNDER BAY FIVE DEP (CYQT 5.)**

THUNDER BAY ON  
THUNDER BAY

EFF 16 FEB 06 CHANGE: Editorial

NAD83