


SID (VECTOR)

SASKATOON SEVEN DEP (CYXE 7.) Geomatics Canada SASKATOON SASKATCHEWAN

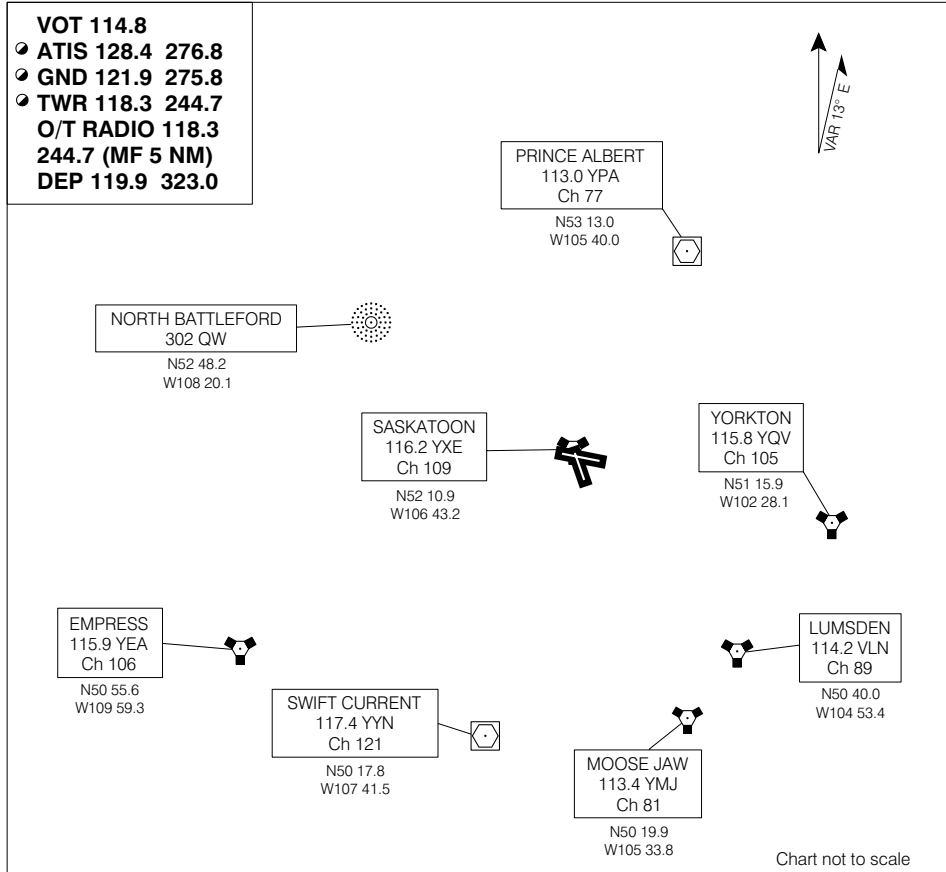

DEPARTURE ROUTE DESCRIPTION

ALL RUNWAYS: Climb rwy hdg or as assigned by ATC. MAINTAIN 5000 ASL or flight planned altitude, whichever is lower. Anticipate radar vectors to filed/assigned route. Expect clearance to flight planned altitude/flight level within 10 minutes after departure.

COMMUNICATION FAILURE

Transponder mode A/3 code 7600. On recognition of a communications failure 10 minutes or less after take-off, and in IFR weather conditions:

1. Upon reaching last assigned altitude proceed directly on course;
2. Maintain last assigned altitude until 10 minutes after take-off;
3. Climb to flight planned altitude.

NOTE: If communications failure occurs more than 10 minutes after take-off, comply with the appropriate procedure for communication failure enroute.

SASKATOON SEVEN DEP (CYXE 7.)

SASKATOON SASKATCHEWAN

EFF 19 FEB 04 CHANGE: 2003 A/D Mag Var

SASKATOON/JOHN G. DIEFENBAKER INTL

NAD83