




Geomatics Canada

VANCOUVER INTL
VANCOUVER BRITISH COLUMBIA

TAXI CHART

VOT 114.8	ATIS 124.6	CLNC DEL 121.4	GND 121.7(S) 127.15(N) 275.8	TWR 118.7(S) 119.55(N) 226.5	DEP 126.125(N) 132.3(S) 363.8
--------------	---------------	-------------------	------------------------------------	------------------------------------	-------------------------------------

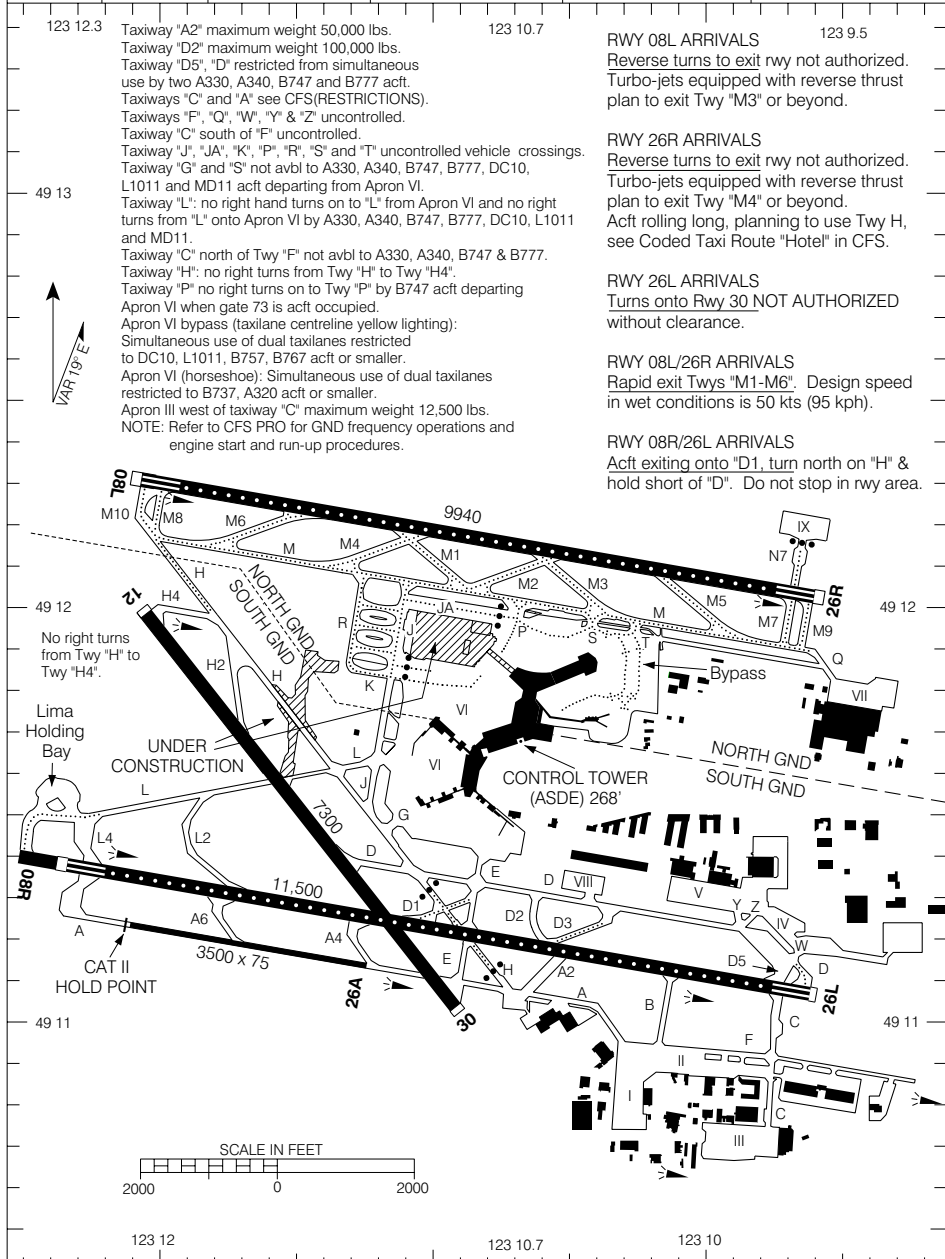

Taxiway 'A2' maximum weight 50,000 lbs.
 Taxiway 'D2' maximum weight 100,000 lbs.
 Taxiway 'D5', 'D' restricted from simultaneous use by two A330, A340, B747 and B777 acft.
 Taxiways 'C' and 'A' see CFS(RESTRICTIONS).
 Taxiways 'F', 'Q', 'W', 'Y' & 'Z' uncontrolled.
 Taxiway 'C' south of 'F' uncontrolled.
 Taxiway 'J', 'JA', 'K', 'P', 'R', 'S' and 'T' uncontrolled vehicle crossings.
 Taxiway 'G' and 'S' not avbl to A330, A340, B747, B777, DC10, L1011 and MD11 acft departing from Apron VI.
 Taxiway 'L': no right hand turns on to 'L' from Apron VI and no right turns from 'L' onto Apron VI by A330, A340, B747, B777, DC10, L1011 and MD11.
 Taxiway 'C' north of Twy 'F' not avbl to A330, A340, B747 & B777.
 Taxiway 'H': no right turns from Twy 'H' to Twy 'H4'.
 Taxiway 'P' no right turns on to Twy 'P' by B747 acft departing Apron VI when gate 73 is acft occupied.
 Apron VI bypass (taxilane centreline yellow lighting): Simultaneous use of dual taxilanes restricted to DC10, L1011, B757, B767 acft or smaller.
 Apron VI (horseshoe): Simultaneous use of dual taxilanes restricted to B737, A320 acft or smaller.
 Apron III west of taxiway 'C' maximum weight 12,500 lbs.
 NOTE: Refer to CFS PRO for GND frequency operations and engine start and run-up procedures.

RWY 08L ARRIVALS
 Reverse turns to exit rwy not authorized.
 Turbo-jets equipped with reverse thrust plan to exit Twy 'M3' or beyond.

RWY 26R ARRIVALS
 Reverse turns to exit rwy not authorized.
 Turbo-jets equipped with reverse thrust plan to exit Twy 'M4' or beyond.
 Acft rolling long, planning to use Twy H, see Coded Taxi Route "Hotel" in CFS.

RWY 26L ARRIVALS
 Turns onto Rwy 30 NOT AUTHORIZED without clearance.

RWY 08L/26R ARRIVALS
 Rapid exit Twys "M1-M6". Design speed in wet conditions is 50 kts (95 kph).

RWY 08R/26L ARRIVALS
 Acft exiting onto 'D1, turn north on 'H' & hold short of 'D'. Do not stop in rwy area.

© 2005 Her Majesty The Queen in Right of Canada, Department of Natural Resources

Source of Canadian Civil Aeronautical Data © 2005 NAV CANADA